


**DRAWINGS (mm)**

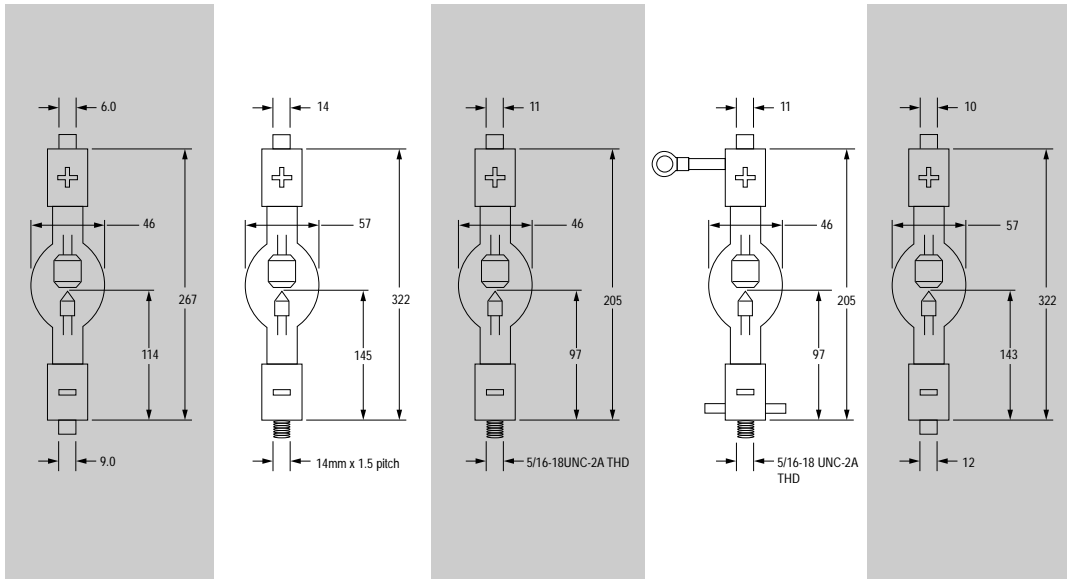

**PART NUMBER**

XS1600

XM1600HTP

XM1600HS

XM1600HSC

XM1600H/V

**SPECIFICATIONS**

POWER (W)

1600

1600

1600

1600

1600

CURRENT(A)

62

65

65

65

65

VOLTAGE (V)

26

25

22

22

25

IGN. VOLTAGE (V)

25K

25K

25K

25K

25K

MINIMUM OPEN  
CIRCUIT VOLTAGE (V)

80+

80+

80+

80+

70+

AVERAGE LUMEN OUTPUT

60,000

60,000

60,000

60,000

65,000

AVERAGE LIFE  
(HOURS)

400

2000

2000

2000

2000

MIN/MAX CURRENT (A)

58/65

55/75

50/70

50/70

55/75

ARC GAP (mm)

5.6

4.2

3.8

3.8

4.7