


DRAWINGS (mm)

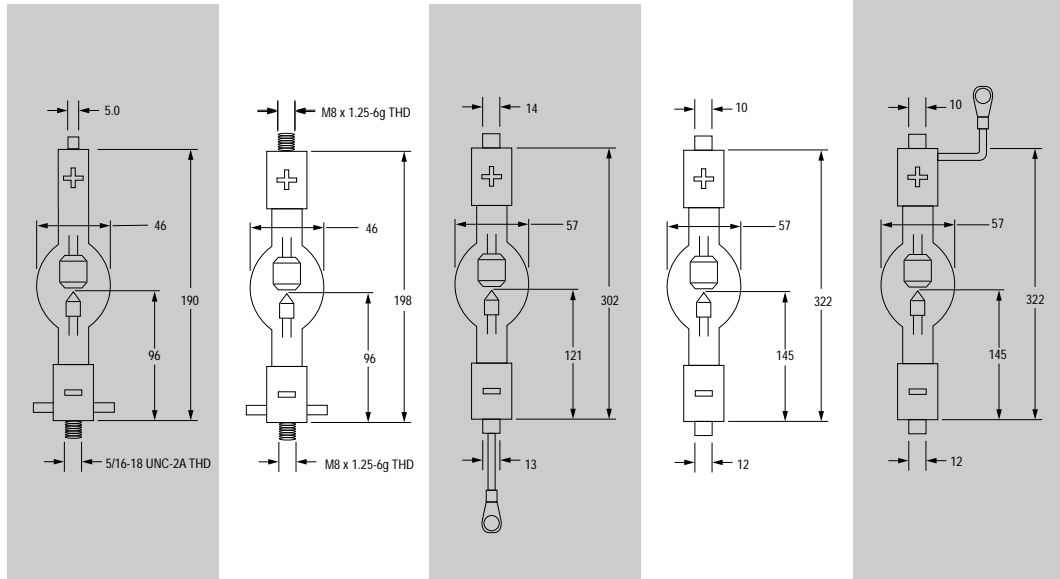

PART NUMBER

XM1600-31HS

XM1600-32HS

XM2000PII

XM2000H/V

XM2000H/VC

SPECIFICATIONS

POWER (W)	1600	1600	2000	2000	2000
CURRENT(A)	65	65	78	80	80
VOLTAGE (V)	22	22	26	24	24
IGN. VOLTAGE (V)	25K	25K	25K	25K	25K
MINIMUM OPEN CIRCUIT VOLTAGE (V)	80+	80+	90+	90+	90+
AVERAGE LUMEN OUTPUT	35,000	35,000	80,000	80,000	80,000
AVERAGE LIFE (HOURS)	1000	1000	1000	2000	2000
MIN/MAX CURRENT (A)	55/72	55/72	75/80	70/85	70/85
ARC GAP (mm)	3.3	3.3	5.6	5.6	5.6