


DRAWINGS (mm)

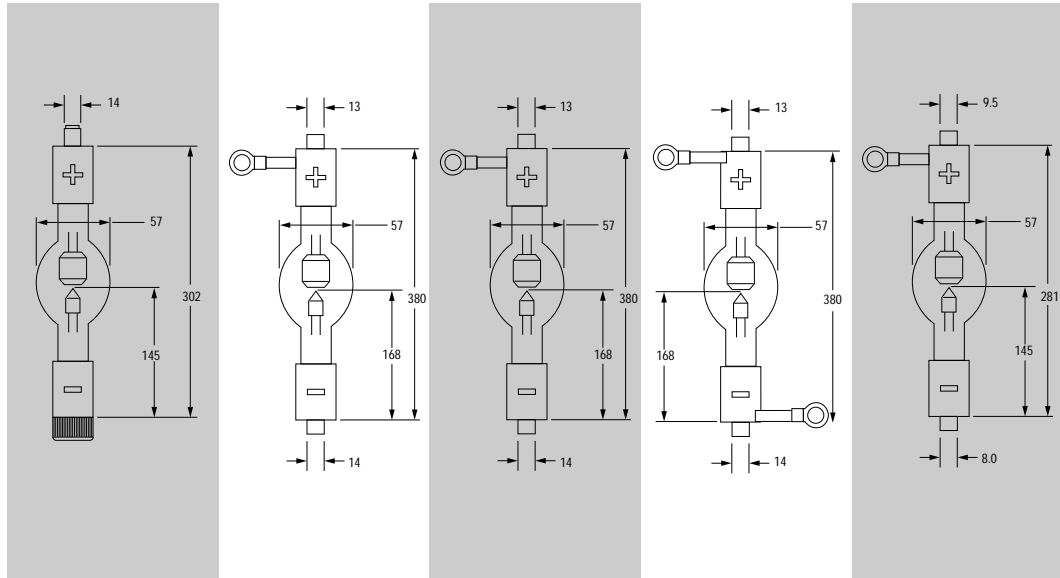

PART NUMBER

XM2500HTP

XM2500H/VC

XMN2500H/VC

XM2500H/VCC

XM2500HS

SPECIFICATIONS

POWER (W)

2500

2500

2500

2500

2500

CURRENT(A)

100

83

83

83

100

VOLTAGE (V)

25

30

30

30

25

IGN. VOLTAGE (V)

25K

25K

25K

25K

25K

MINIMUM OPEN
CIRCUIT VOLTAGE (V)

90+

85+

85+

85+

90+

AVERAGE LUMEN OUTPUT

100,000

100,000

100,000

100,000

100,000

AVERAGE LIFE
(HOURS)

1500

1500

1500

1500

1500

MIN/MAX CURRENT (A)

90/105

80/95

80/95

80/95

90/105

ARC GAP (mm)

5.6

5.8

5.8

5.8

5.8