


DRAWINGS (mm)

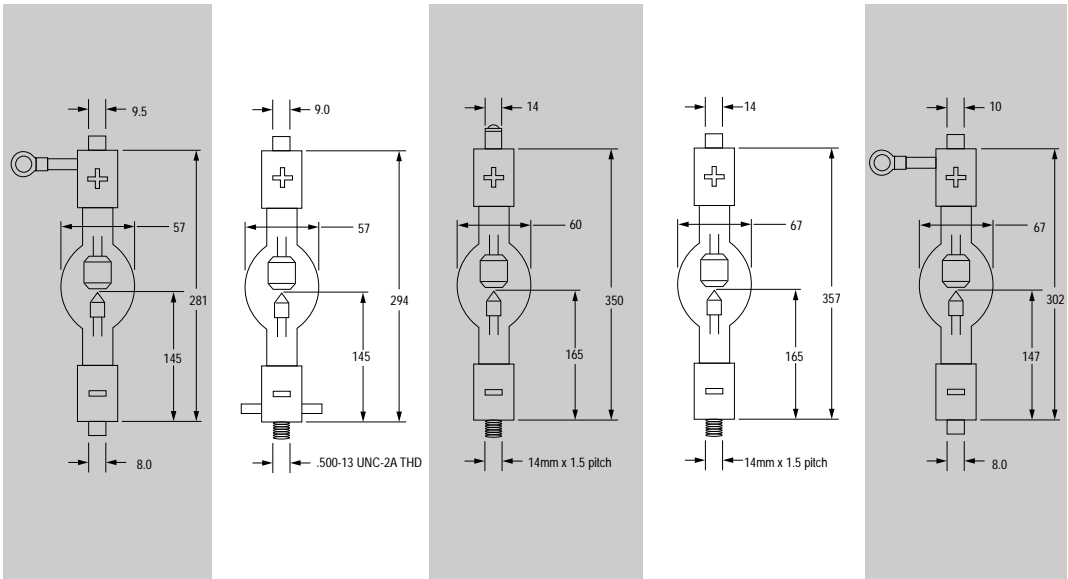

PART NUMBER

XM2500HSC

XM2500-5HS

XM2500-9HS

XM3000HTP

XM3000HS

SPECIFICATIONS

| | | | | | |
|----------------------------------|---------|---------|---------|---------|---------|
| POWER (W) | 2500 | 2500 | 2500 | 3000 | 3000 |
| CURRENT(A) | 100 | 96 | 90 | 100 | 100 |
| VOLTAGE (V) | 25 | 26 | 28 | 30 | 30 |
| IGN. VOLTAGE (V) | 25K | 25K | 25K | 30K | 30K |
| MINIMUM OPEN CIRCUIT VOLTAGE (V) | 90+ | 90+ | 90+ | 100+ | 100+ |
| AVERAGE LUMEN OUTPUT | 100,000 | 100,000 | 100,000 | 130,000 | 130,000 |
| AVERAGE LIFE (HOURS) | 1500 | 1500 | 1500 | 1500 | 1200 |
| MIN/MAX CURRENT (A) | 90/105 | 85/100 | 70/95 | 90/105 | 90/105 |
| ARC GAP (mm) | 5.8 | 5.8 | 5.8 | 6.7 | 6.1 |