


DRAWINGS (mm)

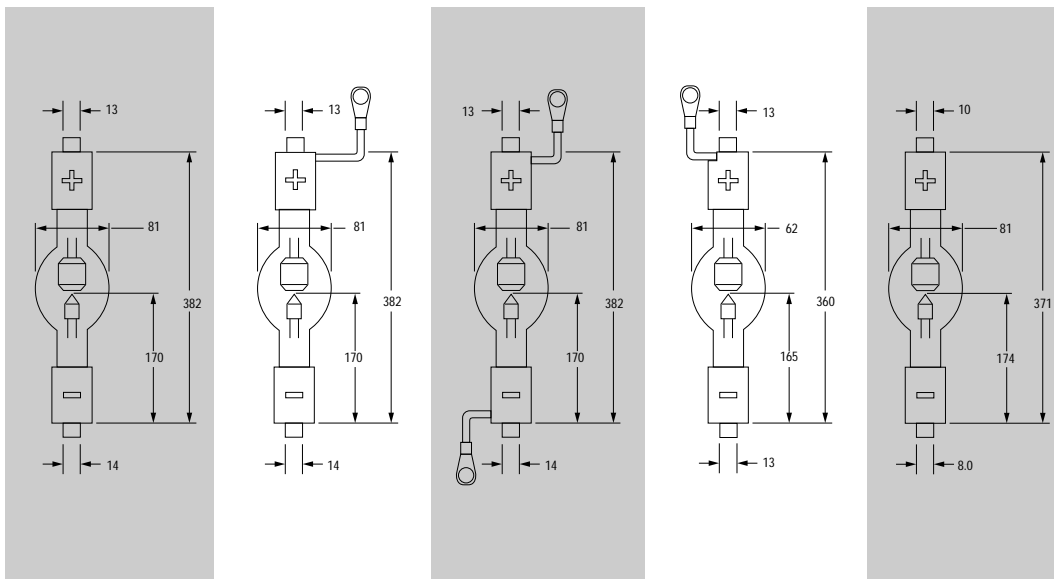

PART NUMBER

XM4200H/V

XM4200H/VC

XM4200H/VCC

XM4200-5H/VC

XM4500HS

SPECIFICATIONS

POWER (W)

4200

4200

4200

4200

4500

CURRENT(A)

140

140

140

140

140

VOLTAGE (V)

30

30

30

30

32

IGN. VOLTAGE (V)

30K

30K

30K

30K

30K

MINIMUM OPEN
CIRCUIT VOLTAGE (V)

100+

100+

100+

100+

100+

AVERAGE LUMEN OUTPUT

190,000

190,000

190,000

190,000

190,000

AVERAGE LIFE
(HOURS)

1250

1250

1250

1500

1250

MIN/MAX CURRENT (A)

125/140

125/140

125/140

125/140

130/145

ARC GAP (mm)

7.2

7.2

7.2

7.2

7.2