


DRAWINGS (mm)

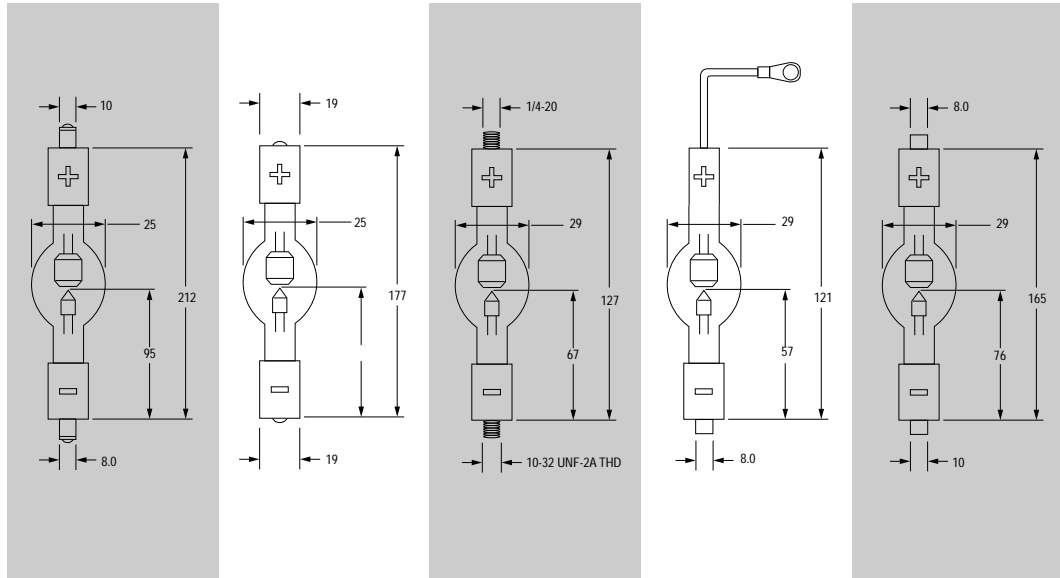

PART NUMBER

XM450H/V

XM450HS

XS500

XM500HS

XM500-3HS

SPECIFICATIONS

POWER (W)

450

450

500

500

500

CURRENT(A)

25

25

25

25

25

VOLTAGE (V)

18

18

20

21

20

IGN. VOLTAGE (V)

12K

12K

15K

15K

15K

MINIMUM OPEN
CIRCUIT VOLTAGE (V)

60+

60+

60+

60+

80+

AVERAGE LUMEN OUTPUT

13,500

13,500

14,000

14,000

14,000

AVERAGE LIFE
(HOURS)

1000

1000

1000

1000

2000

MIN/MAX CURRENT (A)

23/27

23/27

22/27

23/27

20/26

ARC GAP (mm)

2.9

2.5

2.2

2.8

2.8